


DEDICATED SUPPLIER OF

M2M
WIRELESS
MODULES

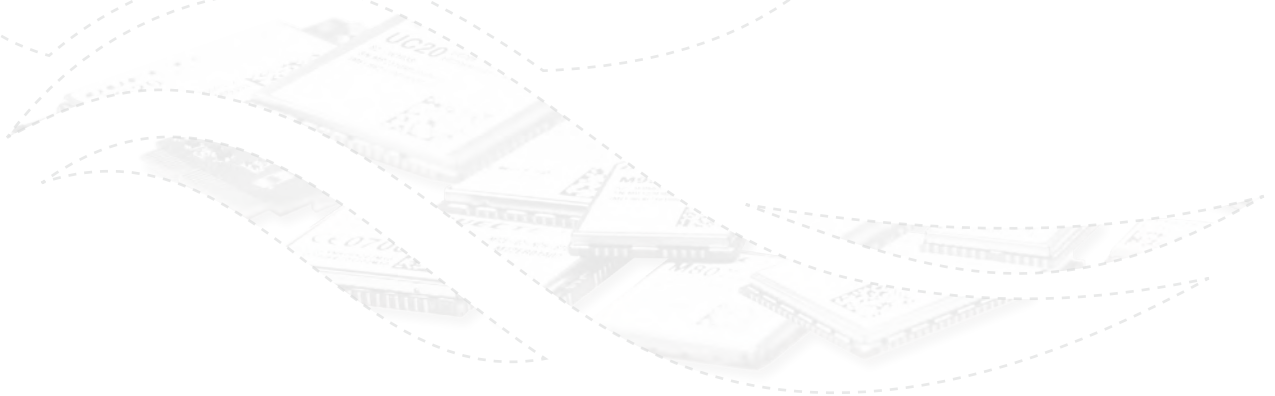

QUECTEL WIRELESS SOLUTIONS CO., LTD.

Quectel GSM/GPRS Module Family

Product	M10	M66	M66-DS	M95	MC60
Picture					
Packaging	64-pin LCC	44-pin LCC	52-pin LCC	42-pin LCC	68-pin LCC
Dimensions (mm)	29.0 × 29.0 × 3.6	17.7 × 15.8 × 2.3	17.7 × 15.8 × 2.3	23.6 × 19.9 × 2.65	18.7 × 15.8 × 2.3
Frequency Range (MHz)	850/ 900/ 1800/ 1900	850/ 900/ 1800/ 1900	850/ 900/ 1800/ 1900	850/ 900/ 1800/ 1900	850/ 900/ 1800/ 1900
Weight (approx.)	6.0 g	1.3 g	1.3 g	3.0 g	1.8 g*
Temperature Range	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Data Transmission					
GPRS Multi-slot Class	12, 1-12 configurable	12, 1-12 configurable	12, 1-12 configurable	12, 1-12 configurable	12, 1-12 configurable
Data Rate (kbps)	85.6 (DL & UL)	85.6 (DL & UL)	85.6 (DL & UL)	85.6 (DL & UL)	85.6 (DL & UL)
SMS	•	•	•	•	•
Protocols	TCP/ UDP/ PPP/ HTTP/ FTP/ SMTP/ PING/ NTP/ NITZ/ MMS Sending/ SSL	TCP/ UDP/ PPP/ HTTP/ FTP/ SMTP/ PING/ NTP/ NITZ/ MMS Sending/ SSL	TCP/ UDP/ PPP/ HTTP/ FTP/ SMTP/ PING/ NTP/ NITZ	TCP/ UDP/ PPP/ HTTP/ FTP/ SMTP/ PING/ NTP/ NITZ/ MMS Sending/ SSL	TCP/ UDP/ PPP/ HTTP/ FTP
Specifications for Voice					
Speech Codec Modes	HR/ FR/ EFR/ AMR	HR/ FR/ EFR/ AMR	HR/ FR/ EFR/ AMR	HR/ FR/ EFR/ AMR	HR/ FR/ EFR/ AMR
Echo Arithmetic	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction
Interfaces					
SIM	1.8V/ 3V	1.8V/ 3V	1.8V/ 3V	1.8V/ 3V	1.8V/ 3V
Audio Analog	2 inputs/ 2 outputs	1 input/ 2 outputs	1 input/ 2 outputs	2 inputs/ 2 outputs	1 input/ 2 outputs
Audio Digital		•	•	•	•
RTC Backup	•	•	•	•	•
UART	3	3	3	2	4
ADC	× 2, 10bit	× 1, 10bit	× 1, 10bit		× 1, 10bit
SD Card Interface	•	•	•		•
GPIO	•				•
Temperature Detection			•	•	•
Enhanced Features					
eCall	•	•	•	•	•
Jamming Detection	•	•	•	•	•
DTMF	•	•	•	•	•
Audio Playback/ Audio Recording	•	•	•	•	•
Dual-SIM			•	•	•
QuecFOTA™	•	•	•	•	•
QuecCell	•	•	•	•	•
QuecLocator	•	•	•	•	•
QuecFile	•	•	•		•
OpenCPU™	•	•	•		•
RIL for Android	•	•	•	•	•
MUX	•	•	•	•	•
GNSS					•
Electrical Features					
Power Supply	3.3 ~ 4.6V	3.3 ~ 4.6V	3.3 ~ 4.6V	3.3 ~ 4.6V	3.3 ~ 4.6V
Low Power Consumption	1.3mA @DRX=5 1.2mA @DRX=9	1.3mA @DRX=5 1.2mA @DRX=9	1.3mA @DRX=5 1.2mA @DRX=9	1.3mA @DRX=5 1.2mA @DRX=9	1.3mA* @DRX=5 1.2mA* @DRX=9
Certifications					
Certifications	CE/ GCF/ PTCRB/ FCC/ IC/ ANATEL/ Rogers/ NCC/ TELCEL/ UCRF/ ICASA	CE/ ANATEL/ ICASA		CE/ GCF/ Vodafone/ PTCRB/ FCC/ IC/ ANATEL/ Rogers/ RCM/ NCC/ TELCEL/ UCRF/ ICASA	
Recommended Applications					
Recommended Applications	Telematics, Smart Metering, Mobile POS Terminal, Gateway, Security, Tracking and Tracing, Remote Maintenance and Control, Mobile Computing, Healthcare, etc.				

* Under development

Quectel UMTS/HSPA(+) Module Family

Product		UC15	UC15 Mini PCIe	UC20	UC20 Mini PCIe	UG95
Picture						
Packaging		108-pin LCC	52-pin Mini PCIe	112-pin LCC	52-pin Mini PCIe	102-pin LGA
Dimensions (mm)		29.0 × 29.0 × 2.5	30.0 × 51.0 × 4.9	29.0 × 32.0 × 2.5	30.0 × 51.0 × 4.9	23.6 × 19.9 × 2.2
3G		UMTS/HSDPA	UMTS/HSDPA	UMTS/HSPA+	UMTS/HSPA+	UMTS/HSPA
Frequency Bands (MHz)	-E(for Europe)	900/2100@UMTS 900/1800@GSM	900/2100@UMTS 900/1800@GSM	900/2100@UMTS 850/900/1800/1900@GSM	900/2100@UMTS 850/900/1800/1900@GSM	900/2100@UMTS 900/1800@GSM
	-A(for America)	850/1900@UMTS 850/900/1800/1900@GSM		850/1900@UMTS	850/1900@UMTS	850/1900@UMTS
	-G(for Global)			800/850/900/1900/2100@UMTS 850/900/1800/1900@GSM	800/850/900/1900/2100@UMTS 850/900/1800/1900@GSM	
	-T(for Thailand)	850/2100@UMTS 850/900/1800/1900@GSM				
Weight (approx.)		4.3g	9.3g	4.9g	9.8g	2.5g
Temperature Range		-40 °C ~ +85 °C	-40 °C ~ +80 °C	-40 °C ~ +85 °C	-40 °C ~ +80 °C	-40 °C ~ +85 °C
Data Transmission						
HSPA data rate (Mbps)		3.6 (DL)	3.6 (DL)	14.4 (DL)/ 5.76 (UL)	14.4 (DL)/ 5.76 (UL)	7.2 (DL)/ 5.76 (UL)
UMTS data rate (Kbps)		384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)
GPRS data rate (Kbps)		85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)
EDGE data rate (Kbps)		236.8 (DL)	236.8 (DL)	236.8 (DL)/ 236.8 (UL)	236.8 (DL)/ 236.8 (UL)	236.8 (DL)
SMS		•	•	•	•	•
CSD		•	•	•	•	•
Protocols		TCP/UDP/PPP/MMS/FTP/SMTP/SMTPS/HTTP/HTTPS/PING/SSL	TCP/UDP/PPP/MMS/FTP/SMTP/SMTPS/HTTP/HTTPS/PING/SSL	PPP/TCP/UDP/FTP/HTTP/FILE/MMS/SMTP/SSL	PPP/TCP/UDP/FTP/HTTP/FILE/MMS/SMTP/SSL	TCP/UDP/PPP/MMS/FTP/FTP/SMTP/SMTPS/HTTP/HTTPS/FTP/PING/SSL
Interfaces						
SIM		1.8V/ 3V	1.8V/ 3V	1.8V/ 3V	1.8V/ 3V	1.8V/ 3V
UART		1	1	2	1	1
USB		2.0 Hi-Speed	2.0 Hi-Speed	2.0 Hi-Speed	2.0 Hi-Speed	2.0 Hi-Speed
Audio Analog		Optional ¹	Optional ¹			
Audio Digital (PCM)		Optional ¹	Optional ¹	Optional ¹	Optional ¹	Optional ¹
RTC Backup				•		•
ADC		× 2, 12bits		× 2, 15bits		
GPIO		•		•		
Antenna		Pads for Primary	Connector for Primary	Pads for Primary, Rx-diversity and GNSS	Connectors for Primary, Rx-diversity and GNSS	Pads for Primary
SIM Card Holder					Optional for -E Version	
Enhanced Features						
eCall		•	•	•	•	◦
DTMF		•	•	•	•	•
QuecFOTA™		•	•	•	•	
DFOTA		•	•	•	•	•
Audio Playback/ Audio Recording		•	•	•	•	
QuecLocator		•	•	•	•	•
QuecFile		•	•	•	•	
RIL Driver		Windows CE6.0*, Android 2.3/4.0/4.2, Windows Mobile 6.1/6.5*	Windows CE6.0*, Android 2.3/4.0/4.2, Windows Mobile 6.1/6.5*	Windows CE6.0, Android 2.3/4.0/4.2/	Windows CE6.0, Android 2.3/4.0/4.2	◦
NDIS				Windows XP/Vista/7/8, Linux2.6/3.0	Windows XP/Vista/7/8, Linux2.6/3.0	
MUX		Linux 2.6 or later, Android 2.3 or later	Linux/ Android	Linux 2.6/3.0, Android 2.3/4.0/4.2	Linux 2.6/3.0, Android 2.3/4.0/4.2	◦
USB Serial Driver		Windows XP/Vista/7/8, Windows CE5.0/ 6.0/7.0, Windows Mobile 6.1*/6.5*, Linux 2.6 or later, Android 2.3 or later	Windows XP/Vista/7/8, Windows CE5.0/ 6.0/7.0, Windows Mobile 6.1/6.5*, Linux/ Android	Windows XP/Vista/7/8, Windows CE5.0/6.0/7.0, Android 2.3/4.0/4.2, Linux 2.6/3.0	Windows XP/Vista/7/8, Windows CE5.0/6.0/7.0, Android 2.3/4.0/4.2, Linux 2.6/3.0	Windows XP/Vista/7, Linux 2.6/3.0, Android 2.3/4.0/4.2
SIM Detection		•		•		
GNSS				GPS/GLONASS	GPS/GLONASS	
Firmware Update		via USB/ UART Interface	via USB/ UART Interface	via USB/ UART Interface	via USB/ UART Interface	via USB/ UART Interface
Electrical Features						
Supply Voltage Range		3.3 ~ 4.3V	3.0~3.6V, typ. 3.3V	3.3 ~ 4.3V	3.0~3.6V, typ. 3.3V	3.3~4.3V, typ. 3.8V
Power Consumption		1.8mA@ GSM sleep, DRX=9 1.7mA@ UMTS sleep, DRX=9	3.5mA@ GSM sleep, DRX=9 3.3mA@ UMTS sleep, DRX=9	1.5mA@GSM sleep, DRX=9 1.1mA@UMTS sleep, DRX=9	3.1mA@GSM sleep, DRX=9 3.0mA@UMTS sleep, DRX=9	0.96mA@GSM sleep, DRX=9 1.15mA@UMTS sleep, DRX=9
Certifications						
Certifications		CE/ GCF/ FCC/ PTCRB/ IC/ AT&T/ Rogers/ NCC/ NBTC/ OFCA/ RCM/ CCC/ TA/ NAL/ DoC ²	CE/ GCF/ NCC/ PTCRB/ FCC/ DoC ²	CE/ FCC/ IC/ KC/ NCC/ OFCA/ GCF/ PTCRB/ RCM/ SKT/ AT&T/ Rogers/ ANATEL/ Vodafone/ ICASA/ CCC/ NBTC/ JATE/ TELEC/TA/ NAL/ DoC ²	CE/ FCC/ PTCRB/ GCF/ RCM/ AT&T/ DoC ²	CE/ GCF/ FCC/ IC/ ICASA/ PTCRB/ AT&T/ Rogers/ DoC ²
Recommended Applications						
Recommended Applications		Telematics, Smart Metering, Mobile POS Terminal, Gateway, Security, Tracking and Tracing, Remote Maintenance and Control, Networking, Mobile Computing, Healthcare, etc.				

Note 1: Only supported in Telematics Version.
Note 2: for Russia

◦ & * Under development

Quectel LTE Module Family

UG96	Product	EC20	EC20 Mini PCIe
	Picture		
102-pin LGA	Packaging	140-pin LCC	52-pin Mini PCIe
26.5 × 22.5 × 2.2	Dimensions (mm)	29.0 × 32.0 × 2.4	30.0 × 51.0 × 4.9
UMTS/HSPA	4G	LTE Cat3	LTE Cat3
800/850/900/1900/2100@UMTS 850/900/1800/1900@GSM	Frequency Bands (MHz)	–E (for Europe) B1/3/5/7/8/20 @FDD-LTE, B1/5/8 @WCDMA 850/900/1800/1900 @GSM –A (for America) B2/4/5/12/17 @FDD-LTE, B2/4/5 @WCDMA 850/1900 @GSM –C (for China) B1/3/8 @FDD-LTE, B38/39/40/41 @TDD-LTE B1/B8 @WCDMA, B34/39 @TD-SCDMA, 900/1800 @GSM –CE (for China) B1/B3 @FDD-LTE, B38/B39/B40/B41 @TDD-LTE B1 @WCDMA, B34/B39 @TD-SCDMA, BC0 @CDMA2000 1X/EVDO, 900/1800 @GSM	B1/3/5/7/8/20 @FDD-LTE, B1/5/8 @WCDMA 850/900/1800/1900 @GSM B2/4/5/12/17 @FDD-LTE, B2/4/5 @WCDMA 850/1900 @GSM B1/3/8 @FDD-LTE, B38/39/40/41 @TDD-LTE B1/B8 @WCDMA, B34/39 @TD-SCDMA, 900/1800 @GSM B1/B3 @FDD-LTE, B38/B39/B40/B41 @TDD-LTE B1 @WCDMA, B34/B39 @TD-SCDMA, BC0 @CDMA2000 1X/EVDO, 900/1800 @GSM
	Weight (approx.)	4.6	9.5
	Temperature Range	-40 °C ~ +85 °C	-40 °C ~ +80 °C
	3.1g		
-40 °C ~ +85 °C			
7.2 (DL)/ 5.76 (UL)	Data Transmission		
384 (DL)/ 384 (UL)	LTE data rate (Mbps)	LTE-FDD Max 100 (DL)/ Max 50 (UL) LTE-TDD Max 61 (DL)/ Max 18 (UL)	LTE-FDD Max 100 (DL)/ Max 50 (UL) LTE-TDD Max 61 (DL)/ Max 18 (UL)
85.6 (DL)/ 85.6 (UL)	DC-HSPA+ data rate (Mbps)	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)
236.8 (DL)/ 236.8 (UL)	WCDMA data rate (Kbps)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)
•	TD-SCDMA data rate (Mbps)	4.2 (DL)/ 2.2 (UL)	4.2 (DL)/ 2.2 (UL)
•	EDGE data rate (Kbps)	236.8 (DL)/ 236.8 (UL)	236.8 (DL)/ 236.8 (UL)
TCP/ UDP/ PPP/ MMS/ HTTP/ HTTPS/ SMTP/ SMTPS/ FTP/ NTP/ NITZ/ PING/ SSL	GPRS data rate (Kbps)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)
	SMS	•	•
	CSD	•	•
1.8V/ 3V	Protocols	TCP/ UDP/ PPP/ FTP/ HTTP/ HTTPS/ SMTP/ MMS/ FTPS/ SMTPS/ NTP/ PING/ QMI/ SSL/ NITZ	TCP/ UDP/ PPP/ FTP/ HTTP/ HTTPS/ SMTP/ MMS/ FTPS/ SMTPS/ NTP/ PING/ QMI/ SSL/ NITZ
1	Interfaces		
2.0 Hi-Speed	SIM	1.8V/ 3V	1.8V/ 3V
	UART	1	1
Optional ¹	USB	2.0 Hi-Speed	2.0 Hi-Speed
•	IIC	•	•
	Audio Digital (PCM)	Optional ¹	Optional ¹
	ADC	× 2, 15bits	
	Antenna	Pads for Primary, Rx-diversity and GNSS	Connector for Primary, Rx-diversity and GNSS
	SIM Card Holder		Optional
	Enhanced Features		
•	TTS	•	•
•	DTMF	•	•
•	DFOTA	•	•
•	QM/ Rmnet	•	•
•	Audio Playback/ Audio Recording	Optional ¹	Optional ¹
•	QuecLocator	•	•
•	RIL Driver	Android 2.3/ 4.0/ 4.2/ 4.4/ 5.0	Android 2.3/ 4.0/ 4.2/ 4.4/ 5.0
•	NDIS	Windows XP/ Vista/ 7/ 8, Windows CE5.0/ 6.0/7.0	Windows XP/ Vista/ 7/ 8, Windows CE5.0/ 6.0/7.0
•	ECM	Linux 2.6 or later	Linux 2.6 or later
•	Gobinet	Linux 2.6 or later	Linux 2.6 or later
•	Linux qml wwan	Linux 2.6 or later	Linux 2.6 or later
•	USB Serial Driver	Windows XP/ Vista/ 7/ 8, Windows CE5.0* 6.0* 7.0* Linux 2.6 or later, Android 2.3 or later	Windows XP/ Vista/ 7/ 8, Windows CE5.0* 6.0* 7.0* Linux 2.6 or later, Android 2.3 or later
•	SIM Detection	•	•
•	GNSS	GPS/ GLONASS	GPS/ GLONASS
•	Firmware Update	via USB/ UART Interface	via USB/ UART Interface
•	Electrical Features		
•	Supply Voltage Range	3.3~4.3 V, typ. 3.8V	3.0~3.6V, typ. 3.3V
•	Power Consumption	20uA@ Power off 3mA@ Sleep	5.5mA@ Sleep
•	Certifications		
•	Certifications	CCC/ CE/ NAL/ TA/ DoC ² / KC/ SKT/ NCC/ ICASA/ GCF* 7/ FCC*	CCC/ CE/ NAL/ TA/ DoC ² / KC/ SKT/ NCC/ ICASA/ GCF* 7/ FCC*
•	Recommended Applications		
•	Recommended Applications	Telematics, Smart Metering, Mobile POS Terminal, Gateway, Security, Tracking and Tracing, Remote Maintenance and Control, Networking, Mobile Computing, Healthcare, etc.	

Note 1: Only supported in Telematics Version.
Note 2: for Russia

◦ & * Under development

Quectel LTE Module Family

Product		EC21/ EC21Mini PCIe	EC25/ EC25 Mini PCIe
Picture			
Packaging		144-pin LCC (EC21) 52-pin (EC21 Mini PCIe)	144-pin LCC (EC25) 52-pin (EC25 Mini PCIe)
Dimensions (mm)		29.0 × 32.0 × 2.4 (EC21) 30.0 × 51.0 × 4.9 (EC21 Mini PCIe)	29.0 × 32.0 × 2.4 (EC25) 30.0 × 51.0 × 4.9 (EC25 Mini PCIe)
4G		LTE Cat1	LTE Cat4
Frequency Bands (MHz)	-E (for Europe)	B1/B3/B5/B7/B8/B20@FDD LTE; B1/B5/B8@WCDMA; B3/B8@GSM	B1/B3/B5/B7/B8/B20@FDD LTE; B38/B40/B41@TDD LTE; B1/B5/B8@WCDMA; B3/B8@GSM
	-V (for VZW)	B4/B13@FDD LTE	B4/B13@FDD LTE
	-A (for AT&T)	B2/B4/B12@FDD LTE, B2/B5@WCDMA	B2/B4/B12@FDD LTE, B2/B4/B5@WCDMA
	-AUT (for Telstra)	B3/B7/B28@FDD LTE; B1/B5@WCDMA	TBD
	-AUTL	B3/B7/B28@FDD LTE	
	-J (for Japan)		TBD
	-KS (for Korea)	B3/B5/B7/B8@FDD LTE	
Weight (approx.)		4.6 (EC21) 9.8 (EC21 Mini PCIe)	4.6 (EC25) 9.8 (EC25 Mini PCIe)
Temperature Range		-40 °C ~ +85 °C (EC21) -40 °C ~ +80 °C (EC21 Mini PCIe)	-40 °C ~ +85 °C (EC25) -40 °C ~ +80 °C (EC25 Mini PCIe)
Data Transmission			
LTE data rate (Mbps)		LTE-FDD Max 10M (DL)/ Max 5M (UL)	LTE-FDD Max 150Mbps (DL) Max 50Mbps (UL) LTE-TDD Max 130Mbps (DL) Max 35Mbps (UL)
DC-HSPA+ data rate (Mbps)		42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)
WCDMA data rate (Kbps)		384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)
EDGE data rate (Kbps)		236.8K (DL)/ 236.8K (UL)	236.8K (DL)/ 236.8K (UL)
GPRS data rate (Kbps)		85.6K (DL)/ 85.6K (UL)	85.6K (DL)/ 85.6K (UL)
SMS		•	•
CSD		•	•
Protocols		TCP/ UDP/ PPP/ FTP*/ HTTP/ HTTPS/ SMTP*/ MMS/* FTPS*/ SMTPS*/ NTP/ PING/ QMI*/ SSL*/ NITZ*	TCP/ UDP/ PPP/ FTP*/ HTTP/ HTTPS/ SMTP*/ MMS/* FTPS*/ SMTPS*/ NTP/ PING/ QMI*/ SSL*/ NITZ*
Interfaces			
SIM		1.8V/ 3V	1.8V/ 3V
UART		1	1
USB		2.0 Hi-Speed	2.0 Hi-Speed
IIC		•	•
Audio Digital (PCM)		Optional ¹	Optional ¹
ADC		× 2, 15bits (EC21)	× 2, 15bits (EC25)
GPIO		•	•
Antenna		Pads for Primary, Rx-diversity and GNSS	Pads for Primary, Rx-diversity and GNSS
Enhanced Features			
eCall		•	•
DTMF		•	•
DFOTA		•	•
QM/ Rmnet		•	•
Audio Playback/ Audio Recording		Optional ¹	Optional ¹
QuecLocator		•	•
QuecFile		•	•
RIL Driver		Android 2.3/ 4.0/ 4.2/ 4.4/ 5.0	Android 2.3/ 4.0/ 4.2/ 4.4/ 5.0
NDIS		Windows XP/ Vista/ 7/ 8, Windows CE5.0/ 6.0/7.0	Windows XP/ Vista/ 7/ 8, Windows CE5.0/ 6.0/7.0
ECM		Linux 2.6 or later	Linux 2.6 or later
Gobinet		Linux 2.6 or later	Linux 2.6 or later
Linux qml wwan		Linux 3.4 or later	Linux 3.4 or later
USB Serial Driver		Windows XP/ Vista/ 7/ 8/ 8.1, Windows CE5.*0/ 6.0*/7.0* Linux 2.6 or later, Android 2.3/4.0/4.2/4.4	Windows XP/ Vista/ 7/ 8/ 8.1, Windows CE5.*0/ 6.0*/7.0* Linux 2.6 or later, Android 2.3/4.0/4.2/4.4
SIM Detection		•	•
GNSS		GPS/ GLONASS/ Beidou/ Galileo	GPS/ GLONASS/ Beidou/ Galileo
Firmware Update		via USB/ UART Interface	via USB/ UART Interface
Electrical Features			
Supply Voltage Range		3.3~4.3 V (EC21) 3.0~3.6 V (EC21 Mini PCIe)	3.3~4.3 V (EC25) 3.0~3.6 V (EC25 Mini PCIe)
Power Consumption		TBD	TBD
Certifications			
Certifications		CE*/ FCC*/ PTCRB*/ GCF*/ VZW*/ AT&T*	CE*/ FCC*/ PTCRB*/ GCF*/ VZW*/ AT&T*
Recommended Applications			
Recommended Applications		Telematics, Smart Metering, Mobile POS Terminal, Gateway, Security, Tracking and Tracing, Remote Maintenance and Control, Networking, Mobile Computing, Healthcare, etc.	

Note 1: Only supported in Telematics Version.


* Under development

Quectel GNSS Module Family

Product		Standalone Modules			Patch Antenna Modules	
		L26	L70/ L70-R/ L70-RL*	L76/ L76B/ L76-L*	L80/ L80-R	L86
		Compatible			Compatible	
Picture						
GNSS		GLONASS/ GPS/ QZSS	GPS/ QZSS	GLONASS/ GPS/ QZSS(L76) GPS/ BeiDou(L76B)	GPS/ QZSS	GLONASS/ GPS/ QZSS
Packaging		24-pin LCC	18-pin LCC	18-pin LCC	12-pin LCC	12-pin LCC
Dimensions (mm)		16.0 × 12.2 × 2.4	10.1 × 9.7 × 2.5	10.1 × 9.7 × 2.5	16.0 × 16.0 × 6.45	18.4 × 18.4 × 6.45
Weight (approx.)		1.0	0.6	0.6	6.0	7.6
Temperature Range	Operation	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
	Storage	-45 °C to +125 °C	-45 °C to +125 °C	-45 °C to +125 °C	-45 °C to +125 °C	-45 °C to +125 °C
General Features						
Chip Solution		MT3333	MT3339 (L70) MT3337 (L70-R/ L70-RL)	MT3333	MT3339 (L80) MT3337 (L80-R)	MT3333
L1 Band Receiver (C/A Code)	Channel Number	33 Track/ 99 Acq.	22 Track/ 66 Acq.	33 Track/ 99 Acq.	22 Track/ 66 Acq.	33 Track/ 99 Acq.
	SBAS	WAAS/ EGNOS/ MSAS/ GAGAN	WAAS/ EGNOS/ MSAS/ GAGAN (Only supported L70)	WAAS/ EGNOS/ MSAS/ GAGAN	WAAS/ EGNOS/ MSAS/ GAGAN	WAAS/ EGNOS/ MSAS/ GAGAN
Sensitivity	Autonomous Acquisition	-148dBm	-148dBm (L70/ L70-R) -149dBm (L70-RL)	-148dBm (L76/ L76B) -149dBm (L76-L)	-148dBm	-148dBm
	Reacquisition	-160dBm	-160dBm (L70/ L70-R) -161dBm (L70-RL)	-160dBm (L76/ L76B) -161dBm (L76-L)	-160dBm	-160dBm
	Tracking	-167dBm	-165dBm (L70/ L70-R) -167dBm (L70-RL)	-165dBm (L76/ L76B) -167dBm (L76-L)	-165dBm	-165dBm
TTFF (Time To First Fix)	Cold Start	<35s, Autonomous <15s, With EASY	<35s, Autonomous <15s, With EASY	<35s, Autonomous <15s, With EASY	<35s, Autonomous <15s, With EASY	<35s, Autonomous <15s, With EASY
	Warm Start	<30s, Autonomous <5s, With EASY	<30s, Autonomous <5s, With EASY	<30s, Autonomous <5s, With EASY	<30s, Autonomous <5s, With EASY	<30s, Autonomous <5s, With EASY
	Hot Start	<1s	<1s	<1s	<1s	<1s
Position Accuracy (autonomous)		<2.5m CEP	<2.5m CEP	<2.5m CEP	<2.5m CEP	<2.5m CEP
Velocity Accuracy (without aid)		<0.1m/s	<0.1m/s	<0.1m/s	<0.1m/s	<0.1m/s
Maximum Acceleration Accuracy (without aid)		<0.1m/s²	<0.1m/s²	<0.1m/s²	<0.1m/s²	<0.1m/s²
Timing Accuracy		<10ns	<10ns	<10ns	<10ns	<10ns
Max Update Rate		10Hz	10Hz	10Hz	10Hz	10Hz
Baud Rate(default)		9600bps	9600bps	9600bps	9600bps	9600bps
Anti-jamming		•	•	•	•	•
LNA			Only supported L70-RL	Only supported L76-L		
Electrical Data						
Power Supply		2.8V to 4.3V	2.8V to 4.3V	2.8V to 4.3V	3.0V to 4.3V	3.0V to 4.3V
I/O Voltage		2.7V to 2.9V	2.7V to 2.9V	2.7V to 2.9V	2.7V to 2.9V	2.7V to 2.9V
Power Consumption	Acquisition	29mA (GPS+GLONASS) 26mA (GPS)	18mA (L70) 16mA (L70-R) 21mA (L70-RL)	25mA (GPS+GLONASS)/ 21mA (GPS) (L76) 23mA (GPS+BeiDou) (L76B) 29mA (GPS+GLONASS) (L76-L)	25mA	30mA (GPS+GLONASS)
	Tracking	21mA (GPS+GLONASS) 18mA (GPS)	12mA (L70) 13mA (L70-R) 18mA (L70-RL)	18mA (GPS+GLONASS)/ 15mA (GPS) (L76) 18mA (GPS+BeiDou) (L76B) 22mA (GPS+GLONASS) (L76-L)	20mA	26mA (GPS+GLONASS)
	Backup	7uA	7uA (L70) 8uA (L70-R/ L70-RL)	7uA	7uA	7uA
Interfaces						
UART		•	•	•	•	•
IIC (NMEA)						
DR IIC						
Reset		•	•	•	•	•
Time Pulse		•	•	•	•	•
Antenna						
Short-Circuit Detection & Open-Circuit Monitoring		•			Only supported L80	•
Automatic Switch between External and Internal Antenna					•	•
Antenna Type		Active or passive	Active or passive	Active or passive	Embedded patch antenna or external active antenna	Embedded patch antenna or external active antenna
Antenna Power		External or internal	External or internal	External or internal	Internal	Internal
Certifications						
Certifications		CE	CE	CE	CE	CE
Recommended Applications						
Recommended Applications		Vehicle Tracking and Tracing, Pet Tracking, Asset Tracking, Connected PND, GIS Application, Security, Industrial PDA, Digital Camera, etc.				

* Under development

Global Presence

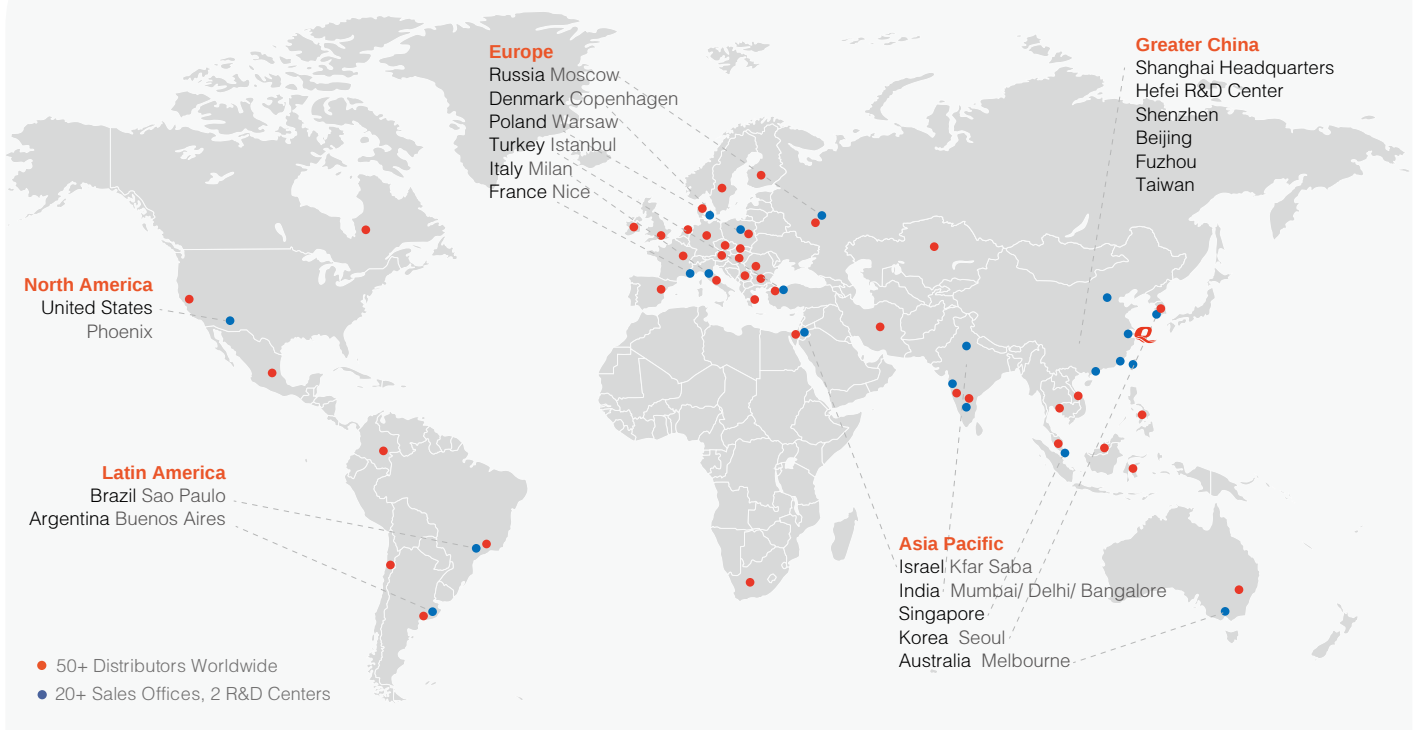

Overseas

Europe

Email: europe@quectel.com

Italy

Email: italy@quectel.com

France

Email: france@quectel.com

Poland

Email: poland@quectel.com

North America

Email: northamerica@quectel.com

South-East Asia

Email: southeastasia@quectel.com

Korea

Email: korea@quectel.com

Russia

Email: russia@quectel.com

Denmark

Email: denmark@quectel.com

Turkey

Email: turkey@quectel.com

Latin America

Email: latinamerica@quectel.com

Brazil

Email: brazil@quectel.com

Israel

Email: israel@quectel.com

India

Email: india@quectel.com

Greater China

Shanghai

Email: sales@quectel.com

Shenzhen

Email: shenzhen@quectel.com

Fuzhou

Email: fuzhou@quectel.com

Beijing

Email: beijing@quectel.com

Taiwan

Email: taiwan@quectel.com

Headquarters

Office # 501, Building 13, No.99 Tianzhou Road, Shanghai, China 200233

Tel: +86-21-5108 6236

Fax: +86-21-5445 3668

Web: www.quectel.com

Email: info@quectel.com

Technical Support: support@quectel.com

